

SR-158, MP 0 to MP 3.8, Pineview Dam to Eden



Project

Project ID: 2015008
Improvement Type: Widening
Total Length: 3.8 miles
Long-Range Plan Phase: 2
Description:
 Add one travel lane in each direction
Need:
 Improve capacity and safety by widening road along Pineview Reservoir.

Cost

Estimated Cost (2014 dollars)

Phase 1:
 Phase 2: \$24,500,000
 Phase 3:
 Unfunded:
Total: \$24,500,000

Location

Region 1
 Weber County

Route SR-158
 Mileposts: 0.0 - 3.8

Prioritization

Widening

Total Score	AADT:	2.0/20
20.25/100	Truck AADT:	1.0/10
	Functional Class:	0.0/5
	Volume/Capacity:	0/25
	Safety Index:	3.75/25
	Transportation Growth:	6.0/15

Safety

Crash Rate (3-year Historic):	0.99
Average Crash Rate:	1.86
Severe Crash Rate:	0.0
Average Severe Crash Rate:	10.4

Capacity

Historic and Projected AADT

Functional Class: Major Collector
2013 Truck Traffic: 27.0%

Right-of-Way

ROW: 162 feet, 74.6 acres

75.0 Parcel acres


51 Parcels

Environmental

Archeological Sites:	0.0 acres
Archeological Surveyed:	2.9 acres
Archeological Not Surveyed:	71.7 acres
Paleontological Sensitivity:	0.0 acres
Rare Plants:	0.0 acres
Wildlife Conservation Species:	85.5 acres

See next page and UPEL report for more information

Existing Conditions

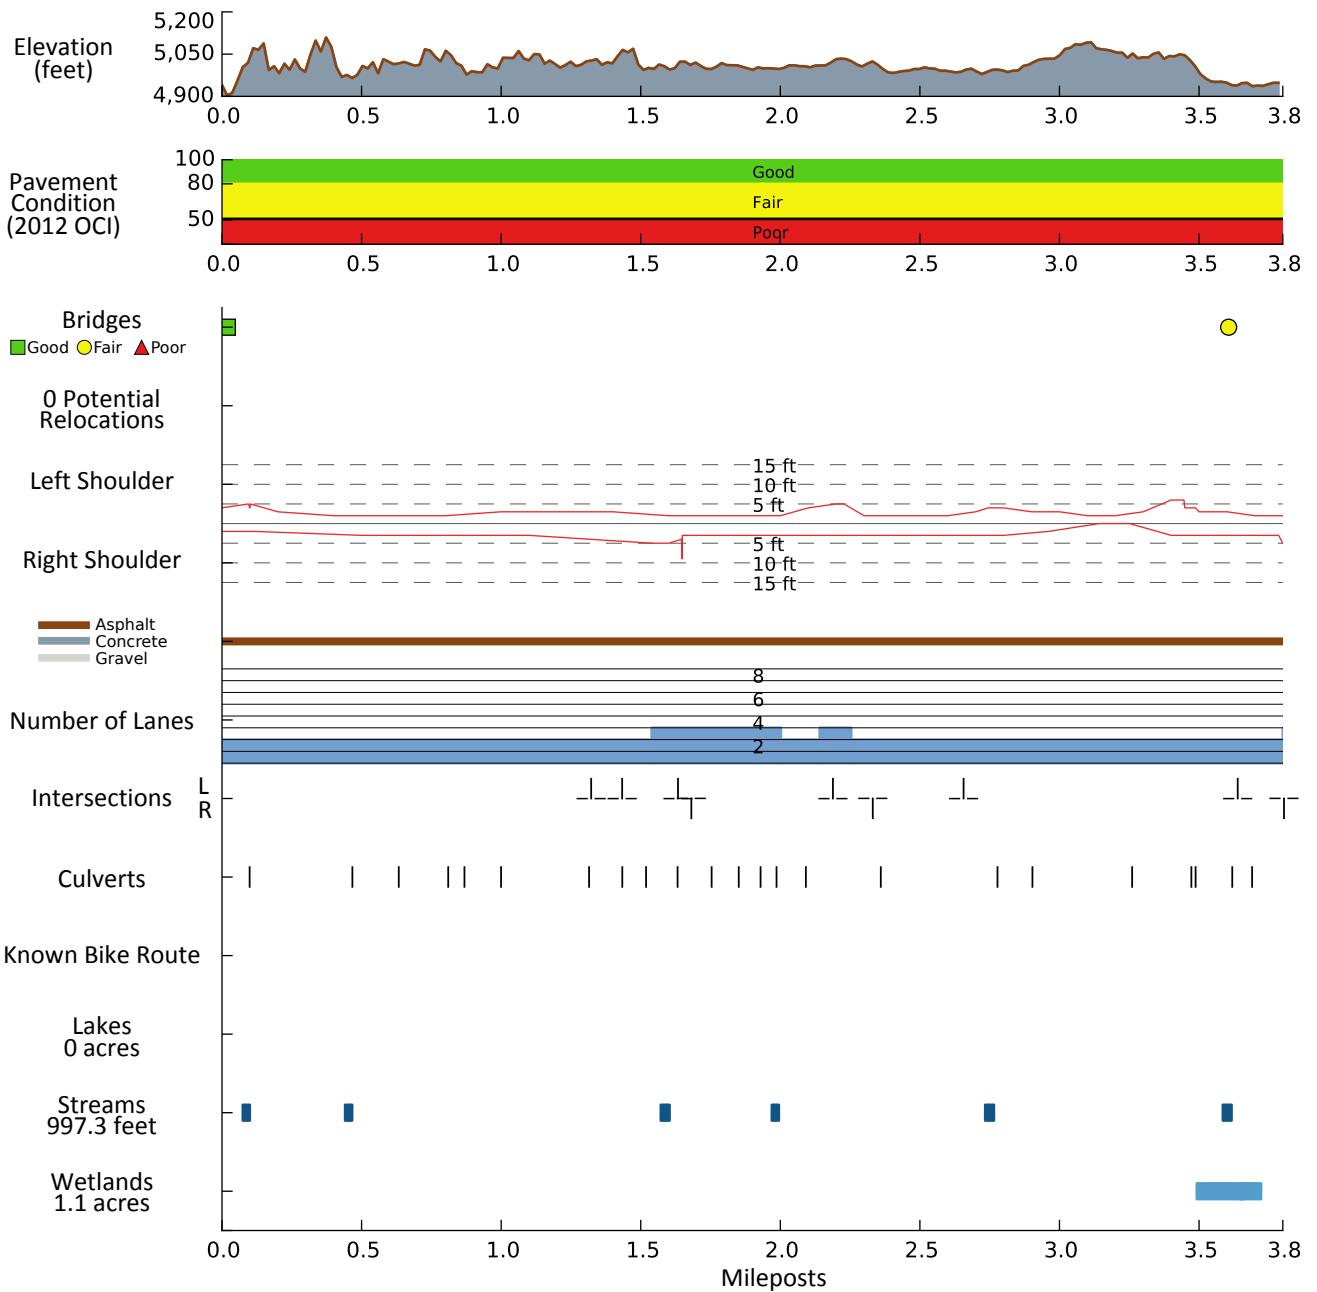

Comments

Over the last 2 years, this portion of the highway has had 21 observed mule deer mortalities, and a number of smaller wildlife species killed along the highway. Additional potential impacts associated with this project include impacts to the North Fork of the Ogden River stream channel, riparian habitat, and wetlands.